

07-20-00

A

PATENT APPLICATION TRANSMITTAL	Atty Docket No.: 3815/95		Total Pages: 93	
	First Inventor or Application Identifier: Usuda			
	Express Mail Label No.: EL595665130US			

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Applicant(s) or Identifier : Usuda et al.
 Serial No. : To be Assigned
 Filed : Concurrently Herewith
 Title : CDMA RECEPTION APPARATUS AND RECEIVED
 SIGNAL POWER MEASURING APPARATUS IN CDMA
 MOBILE COMMUNICATION SYSTEM

Kindly file the annexed papers indicated below:

☒ Application for Patent including Specification (42 pp.) and Drawing(s) (11 sheets)
☒ Declaration and Power of Attorney (3 pages)
☐ Declaration(s) Claiming Small Entity Status
☐ Information Disclosure Statement and copies of reference(s)
☐ Assignment for recordation and Assignment Cover Sheet
☒ Return Receipt Postcard
☒ Other: Certified copy of Japanese Patent Application Ser. No. 11-206789

The fee has been calculated as follows:


	Claims	Claims Paid for	Extra	Rate (Sm. Ent.)	Fee	Rate	Fee
BASIC FILING FEE				\$ 345	\$	\$ 690	\$690
Total	36	- 20 =	16	x \$9	\$	x \$18	\$288
Indep.	4	- 3 =	1	x \$39	\$	x \$78	\$78
MULTIPLE DEPENDENT CLAIM PRESENT				+ \$130	\$	+ \$260	\$260
TOTAL					\$		\$1,316

☒ A check in the amount of \$1,316.00 is enclosed.
☐ The Commissioner is hereby authorized to charge the fee of \$.00 to the undersigned attorney's Deposit Account No. 02-4270.

The Commissioner is hereby authorized to charge any deficiency in the fee or credit any overpayment to the undersigned attorney's Deposit Account No. 02-4270.

Respectfully submitted,

Dated: July 19, 2000

By: 
 Matthew J. Marquardt
 Registration No. 40,997
 Brown Raysman Millstein Felder & Steiner LLP
 Attorney for Applicants
 120 West Forty-Fifth Street
 New York, New York 10036
 Phone: (212) 944-1515 Fax: (212) 840-2429

APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR(S): Masafumi USUDA
Yoshihiro ISHIKAWA
Seizo ONOE

INVENTION: CDMA RECEPTION APPARATUS
AND RECEIVED SIGNAL POWER
MEASURING APPARATUS IN CDMA
MOBILE COMMUNICATION
SYSTEM

S P E C I F I C A T I O N

006720-79267350

This application is based on Patent Application No. 11-206789 (1999) filed July 21, 1999 in Japan, the contents of which are incorporated hereinto by reference.

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a mobile communication reception apparatus in mobile communications applied with digital radio communication system, particularly with CDMA (code division multiple access) system, more specifically to received signal power measurement for transmit power control.

DESCRIPTION OF THE PRIOR ART

An example of relationship between flow of transmit power control of CDMA mobile communication system by the prior art and radio slot configuration is schematically shown in Fig. 1.

As shown in Fig. 1, 1) received signal power measurement is performed for each transmit power control section (hereinafter referred to as "slot"), 2) the measurement result is subjected to a division calculation using a measurement result of noise interference power to obtain a received SNIR (signal power to interference power

ratio), the received SNIR is compared with a reference SNIR, 4) a transmit power control bit is transmitted designating a transmit power control indicator of the received side channel, so that when the comparison result exceeds the reference SNIR, a base station transmit power is decreased, or when the comparison result is below the reference SNIR, the base station transmit power is increased.

As shown in Fig. 1, in the traffic channel, there exists not only a fixed transmit part (shaded in Fig. 1) in which the number of transmit bits is unchanged, but also a variable transmit part in which the transmit bit number is successively changed according to a change in information speed of transmitted data, when there is no data, transmit is stopped. In this case, the fixed transmit part is applied to received signal power measurement.

As shown above, received signal power measurement in a CDMA reception apparatus is performed using a fixed transmit part, however, there is a problem that when signal power of the fixed transmit part is small, measurement accuracy of received signal power is deteriorated, and transmit power control is not performed with good accuracy.

As described above, accuracy degradation of transmit power control has resulted in an increase in transmit power and deterioration of channel capacity.

SUMMARY OF THE INVENTION

An object of the present invention is to improve the measurement accuracy by measuring received signal power using a plurality of slots including past slots, thereby performing even more accurate transmit power control. With this, the object is to achieve improvement of communication quality, reduction of transmit power and increase of capacity.

Further, when using received signals of a plurality of slots including past slots in measurement of received power, measurement accuracy is improved when the traveling speed of the mobile terminal is slow since the propagation path variation is small, however, when the traveling speed of the mobile terminal is high, since the propagation path variation is large, there is a possibility that the measurement accuracy is deteriorated. As shown, the number of slots used for received signal power measurement suitable for accuracy is varied with the traveling speed. Further, to use signals of past slots for measurement of received signal power, by averaging a result of multiplying a change in variation of propagation path and a change in transmit power changed by transmit power control from a past to present, measurement accuracy can be improved. In particular, other than a dedicated traffic channel which is applied to transmit power control, in a downlink here channel reception of a common channel of fixed transmit

power is possible such as a pilot channel, it is possible to estimate propagation path variation using the common channel. However, as there is a variation in propagation path or as estimation accuracy of change in transmit power is degraded, there may be a case where received signal power measurement accuracy is deteriorated by using past slot signals for measurement. In particular, when the fixed transmit part in the above-described slot is large, since many measurable received signals are present in 1 slot, the accuracy is better than averaging many slots, when the number of slots to be averaged is small, or in some case, when there is only one slot to be averaged. Still further, also in a downlink, when the propagation path of common channel is different from the propagation path of a dedicated traffic channel such as in the case where a transmit adaptive array antenna is applied to the transmit side, that is, the base station side, propagation path estimation is difficult, and there may be a case where the accuracy is deteriorated by using a plurality of slots of the past. As shown, the optimum number of slots used for received signal power measurement is changed.

Then, an object of the present invention is to achieve received signal power measurement suitable for respective systems and propagation environments by changing the number of averaging slots according to traveling speed, channel format, and system details without changing the algorithm, improve the measurement accuracy, achieve a

reduction of transmit power and an increase of capacity,
and suppress complexity of reception apparatus, especially
complexity of mobile communication terminal apparatus.

In accordance with the present invention which attains
5 the above objects, there is provided a received signal
power measurement using a plurality of past slots for
improving measurement accuracy of received signal power,
making a transmit power control highly accurate, thereby
enabling high communication quality, reduction of transmit
10 power, and increased capacity. Further, by changing the
number of averaging slots according to the traveling speed,
channel format, and system details, it is possible to
perform received signal power measurement suitable for
respective environments without changing the algorithm,
15 thereby reducing the transmit power, increasing the
capacity and suppressing the size of the reception
apparatus.

The CDMA reception apparatus and received signal power
measurement method described in respective claims are as
20 what follows.

In a first aspect of the present invention, there is
provided a CDMA reception apparatus comprising:

propagation path variation estimation means for
estimating a propagation path variation in a present
25 transmit power control section from respective transmit
power control sections in the past to obtain a propagation
path variation estimation value;

propagation path variation correction means for correcting at least one of vector, amplitude and/or power of a received signal of the plurality of transmit power control sections with the propagation path variation estimation value obtained by the propagation path variation estimation means; and

averaging means for averaging at least one of vector, amplitude and/or power of received signal of the plurality of transmit power control sections corrected by the propagation path variation correction means.

According to the present invention, by using a plurality of slots including past slots for received signal power measurement, measurement accuracy of received signal power can be improved. Further, when using the past slots for received signal power measurement, by making a correction using an estimation value of propagation path variation from the past slot timing up to the present timing, it is possible to perform received signal power measurement more accurately.

In a second aspect of the present invention, there is provided a CDMA reception apparatus comprising:

transmit power changing amount estimation means for estimating a changing amount of transmit power of a communication partner station varied by transmit power control in the present transmit power control section from respective transmit power control sections in the past;

transmit power changing amount correction means for

correcting at least one of vector, amplitude and/or power
of a received signal of the plurality of transmit power
control sections with the transmit power changing amount
estimation value obtained by the transmit power changing
5 amount estimation means; and

averaging means for averaging at least one of vector,
amplitude and/or power of received signal of the plurality
of transmit power control sections corrected by the
transmit power changing amount correction means.

10 According to the present invention, when using the
past slots for received signal power measurement, by
correcting using a change amount of transmit power from
the past slot timing up to the present timing, it is
possible to perform received signal power measurement more
15 accurately.

The averaging means may be provided with vector
addition means for performing vector addition;

division means for dividing a vector added by the
vector addition means with a number of vectors added; and

20 means for converting vector divided by the division
means into a power.

According to the present invention, when averaging
received signals of a plurality of slots including past
slots, by performing averaging by vector addition, it is
25 possible to suppress effects of noise and measurement
accuracy of received signal power can be improved.

The averaging means may be provided with

amplitude addition means for performing amplitude addition;

division means for dividing an amplitude added by the amplitude addition means with a number of amplitudes added;

5 and

means for converting amplitude divided by the division means into a power.

According to the present invention, when averaging received signals of a plurality of slots including past slots, by performing averaging by amplitude addition, simpler and more accurate averaging is possible.

The averaging means may be provided with power addition means for performing power addition;

division means for dividing a power added by the power addition means with a number of powers added.

According to the present invention, when averaging received signals of a plurality of slots including past slots, by performing averaging by power addition, simpler and more accurate averaging is possible.

20 The propagation path variation estimation means may estimate a propagation path variation using a channel not performing transmit power control.

According to the present invention, when estimating propagation path variation, by using a channel not performing transmit power control (for example, common channel or the like), propagation path variation estimation of high accuracy can be performed.

The transmit power changing amount estimation means may estimate a transmit power changing amount using a transmit power control indicator transmitted from own station.

5 According to the present invention, when estimating a transmit power changing amount, by using a transmit power control indicator (for example, transmit power control bit) transmitted from its own station, a high accuracy transmit power changing amount estimation is possible.

10 The averaging means may further comprise averaging section setting means for setting an averaging section.

According to the present invention, by selecting an appropriate averaging section according to the system details and propagation environment, it is possible to
15 perform measurement of received signal power suited to environment without changing the algorithm.

The averaging section setting means may comprise:

means for setting the averaging section to a small section, when performing communication by a channel of
20 which a power allocated to a signal subjected to received signal power measurement existing in each transmit power control section is high; and

means for setting the averaging section to a large section, when performing communication by a channel of
25 which a power allocated to a signal subjected to received signal power measurement existing in each transmit power control section is small.

According to the present invention, depending on the power of received signal subjected to received signal power measurement existing between respective transmit power control sections, when the power is high, the averaging
5 section is reduced to decrease effects of error of past received signals, or when the power is low, the averaging section is increased to reduce effects of measurement error due to noise, it is possible to set an averaging section for optimum measurement accuracy.

10 The averaging section setting means may comprise:
means for setting the averaging section to a large section, when a partner transmit station performs transmit power control, there is a channel other than channel transmitting to the received station and transmitting a
15 channel not performing transmit power control with the same antenna and directivity, and propagation path variation estimation using the channel not performing transmit power control is possible; and

means for setting the averaging section to a small
20 section, when a partner transmit station performs transmit power control, there is not a channel other than channel transmitting to the reception station and transmitting a channel not performing transmit power control with the same antenna and directivity, or even when transmitting but not
25 performing transmit power control, and propagation path variation estimation using the channel not performing transmit power control is not possible.

According to the present invention, when estimation of propagation path variation is impossible, since when signals of past slots are used, received power measurement accuracy is deteriorated due to effects of propagation path variation, it is possible to reduce the averaging section and enhance the measurement accuracy.

The averaging section setting means may comprise:

traveling speed detection means for detecting a relative traveling speed between a communication partner station and own station; and

means for setting the averaging section to a small section when the detected traveling speed is large, and for setting the averaging section to a large section when the detected traveling speed is small.

According to the present invention, when a traveling speed is high between the opposite transmit station and the own station, by decreasing the averaging section, it is possible to prevent deterioration of received signal power measurement accuracy due to propagation path variation.

In a third aspect of the present invention, there is provided a received signal power measurement method of a CDMA reception apparatus, comprising:

a propagation path variation estimation step for estimating a propagation path variation in a present transmit power control section from respective transmit power control sections in the past to obtain a propagation

path variation estimation value;

a propagation path variation correction step for correcting at least one of vector, amplitude and/or power of a received signal of the plurality of transmit power control sections with the propagation path variation estimation value obtained by the propagation path variation estimation step; and

an averaging step for averaging at least one of vector, amplitude and/or power of received signal of the plurality of transmit power control sections corrected by the propagation path variation correction step.

According to the present invention, by using a plurality of slots including past slots for received signal power measurement, received signal power measurement accuracy can be improved. Further, when using past slots for received signal power measurement, by correcting using an estimation amount of propagation path variation from the past slot timing up to the present timing, it is possible to perform received signal power measurement more accurately.

In a fourth aspect of the present invention, there is provided a received signal power measurement method of a CDMA reception apparatus, comprising:

a transmit power changing amount estimation step for estimating a changing amount of transmit power of a communication partner station varied by transmit power control in the present transmit power control section from

respective transmit power control sections in the past;

a transmit power changing amount correction step for
correcting at least one of vector, amplitude and/or power
of a received signal of the plurality of transmit power
5 control sections with the transmit power changing amount
estimation value obtained by the transmit power changing
amount estimation step; and

an averaging step for averaging at least one of vector,
amplitude and/or power of received signal of the plurality
10 of transmit power control sections corrected by the
transmit power changing amount correction step.

According to the present invention, when using past
slots for received signal power measurement, by correcting
using an estimation value of change amount of transmit
15 power from the past slot timing up to the present timing,
it is possible to perform received signal power measurement
more accurately.

The averaging step may be provided with a vector
addition step for performing vector addition;

20 a division step for dividing a vector added by the
vector addition step with a number of vectors added; and

a step for converting vector divided by the division
step into a power.

According to the present invention, when averaging
25 received signals of a plurality of slots including past
slots, by performing averaging by vector addition, it is
possible to suppress effects of noise and measurement

accuracy of received signal power can be improved.

The averaging step may be provided with an amplitude addition step for performing amplitude addition;

5 a division step for dividing an amplitude added by the amplitude addition step with a number of amplitudes added; and

a step for converting amplitude divided by the division step into a power.

10 According to the present invention, when averaging received signals of a plurality of slots including past slots, by performing averaging by amplitude addition, simpler and more accurate averaging is possible.

The averaging step may be provided with a step for performing power addition;

15 a division step for dividing a power added by the power addition step with a number of powers added.

20 According to the present invention, when averaging received signals of a plurality of slots including past slots, by performing averaging by power addition, simpler and more accurate averaging is possible.

The propagation path variation estimation step may estimate a propagation path variation using a channel not performing transmit power control.

25 According to the present invention, when estimating propagation path variation, by using a channel not performing transmit power control (for example, common channel or the like), propagation path variation

estimation of high accuracy can be performed.

The transmit power changing amount estimation step may estimate a transmit power changing amount using a transmit power control indicator transmitted from own station.

According to the present invention, when estimating a transmit power changing amount, by using a transmit power control indicator (for example, transmit power control bit) transmitted from its own station, a high accuracy transmit power changing amount estimation is possible.

The averaging step may further comprise an averaging section setting step for setting an averaging section.

According to the present invention, by selecting an appropriate averaging section according to the system details and propagation environment, it is possible to perform measurement of received signal power suited to environment without changing the algorithm.

The averaging section setting step may comprise:

a step for setting the averaging section to a small section, when performing communication by a channel of which a power allocated to a signal subjected to received signal power measurement existing in each transmit power control section is high; and

a step for setting the averaging section to a large section, when performing communication by a channel of which a power allocated to a signal subjected to received signal power measurement existing in each transmit power

control section is small.

According to the present invention, depending on the power of received signal subjected to received signal power measurement existing between respective transmit power control sections, when the power is high, the averaging section is reduced to decrease effects of error of past received signals, or when the power is low, the averaging section is increased to reduce effects of measurement error due to noise, it is possible to set an averaging section for optimum measurement accuracy.

The averaging section setting step may comprise:

a step for setting the averaging section to a large section, when a partner transmit station performs transmit power control, there is a channel other than channel transmitting to the reception station and transmitting a channel not performing transmit power control with the same antenna and directivity, and propagation path variation estimation using the channel not performing transmit power control is possible; and

a step for setting the averaging section to a small section, when a partner transmit station performs transmit power control, there is not a channel other than channel transmitting to the reception station and transmitting a channel not performing transmit power control with the same antenna and directivity, or even when transmitting but not performing transmit power control, and propagation path variation estimation using the channel not performing

transmit power control is not possible.

According to the present invention, when estimation of propagation path variation is impossible, since when signals of past slots are used, received power measurement
5 accuracy is deteriorated due to effects of propagation path variation, it is possible to reduce the averaging section and enhance the measurement accuracy.

The averaging section setting step may comprise:

a step for detecting a relative traveling speed
10 between a communication partner station and own station;
and

a step for setting the averaging section to a small section when the detected traveling speed is large, and for setting the averaging section to a large section when
15 the detected traveling speed is small.

According to the present invention, when a traveling speed is high between the opposite transmit station and the own station, by decreasing the averaging section, it is possible to prevent deterioration of received signal
20 power measurement accuracy due to propagation path variation.

The above and other objects, effects, features and advantages of the present invention will become more apparent from the following description of embodiments
25 thereof taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram schematically showing an example of relationship between flow of transmit power control of a prior art CDMA mobile communication system and radio slot configuration;

Fig. 2 is a block diagram showing an example of construction of reception apparatus in the CDMA mobile terminal in an embodiment 1 of the present invention;

Fig. 3 is a block diagram showing an example of construction of a received SNIR measurement part 208 in Fig. 2;

Fig. 4 is a diagram showing the relationship of Figs. 4A and 4B.

Fig. 4A is a block diagram showing an example of construction of a received signal power measurement part 304 in Fig. 3;

Fig. 4B is a block diagram showing an example of construction of a received signal power measurement part 304 in Fig. 3;

Fig. 5 is a block diagram showing an example of construction of a propagation path estimation part to which the present invention is applied;

Fig. 6 is a block diagram showing an example of construction of a transmit power changing amount estimation part to which the present invention is applied;

Fig. 7 is a block diagram showing an example of

construction of a received signal power measurement part
in an embodiment 2 of the present invention;

Fig. 8 is a flow chart for explaining a setting method
of averaging section in the embodiment 1 of the present
5 invention;

Fig. 9 is a flow chart for explaining a setting method
of a forgetting factor α in embodiment 2 of the present
invention; and

Fig. 10 is a flow chart showing an example of operation
10 of a received signal power measurement part.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following, embodiments of the present invention
15 will be described with reference to the drawings.

The present invention can be applied to a base station
reception apparatus as an uplink receiver, however,
because the above-described estimation of propagation path
variation can be performed by a channel not performing the
20 transmit power control, an example of downlink receiver,
that is, a case where a reception apparatus of a mobile
communication terminal is used will be described as the
following embodiment.

25 (Embodiment 1)

Fig. 2 is a block diagram showing an example of
construction of a reception apparatus in a CDMA mobile

terminal in the embodiment 1 of the present invention.

A reception apparatus 200 includes a reception radio part 202, a desreader 204, a received data demodulator 206, a received SNIR measurement part 208 and a SNIR
5 comparator 212.

The reception radio part 202 receives a radio signal transmitted from a radio base station, performs frequency conversion and filtering, and outputs a baseband signal.

In the desreader 204, despreading of the baseband
10 signal is performed, and a received despread signal is outputted to the received data decoder 206 and a received SNIR calculator 208.

In the received data demodulator 206, RAKE combining, error correction decoding and the like are performed to
15 demodulate the received data. At the same time, the received despread signal is inputted to the received SNIR measurement part 208 to output a received SNIR at every slot, a comparison of the outputted value with a target SNIR 210 is performed in the SNIR comparator 212, according
20 to the comparison result, a transmit power control bit 214 (transmit power control indicator) to be transmitted is outputted.

Fig. 3 is a block diagram showing an example of construction of the received SNIR measurement part 208 in
25 Fig. 2.

The received SNIR measurement part 208 comprises a received signal power measurement part 304, a noise

interference power measurement part 306 and a divider 308.

The received despread signal 302 outputted from the desreader 204 is inputted respectively to the received signal power measurement part 304 and the received noise
5 interference power measurement part 306, and the respective measurement results A and B are divided in the divider 308 to obtain a received SNIR 310.

Figs. 4A and 4B is a block diagram showing an example of construction of the received signal power measurement
10 part 304 in Fig. 3.

Here, in Figs. 4A and 4B, alphabet n shows a present number of slots, and K a maximum number of received signal slots for performing averaging.

The received signal power measurement part 304
15 includes a RAKE combiner 404, a delayer 406, a propagation path estimator 407, a transmit power changing amount estimator 409, an averaging part 412, a received signal power calculator 407, and an averaging section setting part 416.

20 The received despread signal 402 of fixed transmit part of the dedicated traffic channel is RAKE combined by the RAKE combiner 404, and an average value of received signal of each slot is stored in the delayer 406. The stored value can be any of vector, amplitude and/or power.
25 Received signal of past slots stored in the delayer 406 is multiplied by the multiplier with the propagation path variation estimation value 408 of the past slot timing and

the present timing generated in the propagation path estimator 407. Further, after multiplication by the multiplier with the estimation value 410 of changing amount of transmit power by transmit power control of the past slot timing and the present timing, averaging is performed along with the present slot in the averaging part 412. Still further, when the stored value is vector or amplitude, it is converted into power by the received signal power calculator 414, and outputted as received signal power.

In the averaging section setting part 416, as will be described later, the averaging section is appropriately set according to the propagation environment and environment of the system in communication.

Fig. 10 is a flow chart showing an example of operation of the received signal power measurement part 304.

First, received despread signal 402 of fixed transmit part of a dedicated traffic channel is RAKE combined by the RAKE combiner 404 (step S1002).

Next, an average value of received signal of each slot is stored in the delayer 406 (step S1004). The stored value can be any of vector, amplitude and/or power.

Next, in the propagation path estimator 407, propagation path variation in the present transmit control section is estimated from information of respective past transmit power control sections to obtain a propagation path variation estimation value 408 (step S1006).

Next, at least one of vector, amplitude and/or power

of received signals of a plurality of transmit power control sections is corrected by multiplying using the propagation path variation estimation value 408 obtained by the propagation path estimator 407 (step S1008).

5 Next, in the transmit power changing amount estimator 409, a changing amount of transmit power changed by transmit power control of the communication partner station in the present transmit power control section is estimated from information of past respective transmit
10 power control sections (for example, past transmit power control bit data stored in any of storage apparatus (not shown) in the reception apparatus) to obtain a transmit power changing amount estimation value 410 (step S1010).

 Next, at least one of vector, amplitude and/or power
15 of received signals of a plurality of transmit power control sections is corrected by multiplying using the transmit power changing amount estimation value 410 obtained by the transmit power changing amount estimator 409 (step S1012).

20 Next, in the averaging part 412, at least one of vector, amplitude and/or power of the corrected received signals of the plurality of transmit power control sections is averaged (step S1014).

 Next, an averaging section setting method in the
25 averaging section setting part 416 will be described with reference to Fig. 8.

 First, for example, the amount of power allocated to

the fixed transmit part of signal from the communication partner station corresponding to the shaded part in Fig. 1 is judged from the channel format in communication (step S802), setting is made so that the averaging section is
5 decreased when the power is large (step S804), or the averaging section is increased when the power is small (step S806). Alternatively, a judgment is made from informed information from the system as to whether or not there is a common channel transmitted without performing
10 transmit power with the same antenna and directivity and propagation path estimation is possible (step S808), when propagation path estimation is possible the averaging section is increased (step S810), or when propagation path estimation is impossible the averaging section is
15 decreased (step S812). On the other hand, when propagation path estimation is not performed, traveling speed of the traveling machine is detected (step S814), when the traveling speed is high and variation of propagation path is large, the averaging section is set
20 small (step S816), or when the traveling speed is low and variation of propagation path is small, the averaging section is set large (step S818).

Fig. 5 is a block diagram showing an example of construction of the propagation path estimator 407 in Figs.
25 4A and 4B.

Here, alphabet n in Fig. 5 shows a present slot number, and K a slot number of largest received signal for

005720" TEST 960

averaging.

The propagation path estimator 407 includes a delayer 504 and a divider 506.

In the propagation path estimator 407, amplitude of
5 a received signal 502 after RAKE combining of the common
channel not performing transmit power control is stored
in the delayer 504 for each slot, by performing division
calculation A/B of the received signal A of the present
slot and the received signal B of respective past slot in
10 the divider 506, thereby outputting a propagation path
variation estimation value 508 of the present slot from
the past respective slots.

Fig. 6 is a block diagram showing an example of
construction of the transmit power changing amount
15 estimator 409 in Figs. 4A and 4B.

Here, alphabet n in Fig. 6 shows a present slot number,
and K a slot number of largest received signal for
averaging.

The transmit power changing amount estimator 409
20 includes a transmit power changing amount converter 604
and a delayer 606.

The transmit power changing amount estimator 409
estimates a changing amount of transmit power from a radio
base station from the transmit power control bit 602
25 transmitted by the mobile terminal to the radio base
station.

First, in the transmit power changing amount converter

604, the transmit power control bit 602 transmitted from the mobile terminal is converted into a transmit power changing amount in consideration of the transmit power control bit to obtain a transmit power control estimation value 608. Next, output after changing is multiplied with the transmit power changing amount from each slot timing up to the present stored in the delayer 606 to obtain a new transmit power control estimation value 608.

10 (Embodiment 2)

In the following, an embodiment 2 according to the present invention will be described with reference to Fig. 7.

Fig. 7 is a block diagram showing an example of construction of a received signal power measurement part in the embodiment 2 of the present invention. In the receiver, construction other than the received signal power measurement part is similar to that in the embodiment 1.

20 A received signal power measurement part 700 in the embodiment 2 includes an α multiplier 702, a delayer 704, a propagation path estimator 705, a transmit power changing amount estimator 707, a received signal power calculator 710, an averaging section setting part 712, a RAKE combiner 25 716 and a $1 - \alpha$ multiplier 718.

The delayer 704, the propagation path estimator 705, the transmit power changing amount estimator 707, the

received signal power calculator 710, the averaging
section setting part 712, and the RAKE combiner 716 have
the same functions as those described in Figs. 4 to 9, and
the α multiplier 702 and the $1-\alpha$ multiplier respectively
5 have functions for multiplying the input with α or $1-\alpha$.

The received signal power measurement part 700 has
a form of a feedback type filter which performs averaging
of the received signal of the present slot and the received
signal of the past slot using a forgetting factor α 702.
10 That is, for the received signal of the past slot stored
in the delayer 704, after multiplication with the
propagation path variation estimation value 706 between
1 slot previous timing and the present timing and the
transmit power changing amount estimation value 708, it
15 is multiplied with the forgetting factor α in the α
multiplier 702 to perform averaging with the received
signal of the present slot. In the received signal power
calculator 710, a received signal power is calculated from
received signal after averaging and the result is
20 outputted. On the other hand, received signal after
averaging is stored again in the delayer 704. In the
averaging section setting part 712, α is appropriately set
according to the propagation environment and details of
the system in communication.

25 Next, setting method of the forgetting factor α will
be described with reference to Fig. 9.

First, for example, the amount of power allocated to

the fixed transmit part of signal from the communication partner station corresponding to the shaded part in Fig. 1 is judged from the channel format in communication (step S902), setting is made so that α is decreased when the power is large (step S904), or α is increased when the power is small (step S906). Alternatively, a judgment is made from informed information from the system as to whether or not there is a common channel transmitted without performing transmit power with the same antenna and directivity and propagation path estimation is possible (step S908), when propagation path estimation is possible α is increased (step S910), or when propagation path estimation is impossible α is decreased (step S912). On the other hand, when propagation path estimation is not performed, traveling speed of the traveling machine is detected (step S914), when the traveling speed is high and variation of propagation path is large, α is set small (step S916), or when the traveling speed is low and variation of propagation path is small, α is set large (step S918).

20

(Effects of the Invention)

(Effects of embodiment 1)

As shown in Fig. 3, by obtaining the received signal power by averaging a plurality of slots including past slots, even when the fixed transmit part included in 1 slot is small, the effective measurement bit number can be increased, and received power measurement of higher

accuracy can be performed.

Further, for the above-shown averaging of a plurality of slots, when a common channel cannot be used for estimation, or when the propagation path fixed transmit part is large, the number of slots for averaging is decreased, or depending on the case, only the present slot is used, averaging by an appropriate averaging slot number can be performed without changing the construction of the receiver and measurement algorithm, whereby high quality communication, reduction of transmit power, and increased channel capacity can be achieved, and complexity of the mobile terminal can be suppressed.

(Effects of embodiment 2)

With the construction as in the embodiment 2, the same effects as shown in embodiment 1 can be obtained, and averaging of the received signal power is performed by weighting average using the forgetting factor α , buffers such as delayer for storing past received signals can be reduced.

For example, in embodiment 1, averaging of a plurality of slots is calculated by Formula 1 shown below.

$$\text{averagedR}_n = (R_n + R_{n-1} + R_{n-2} + R_{n-3}) / 4$$

... [FORMULA 1]

The formula (1) is a formula for averaging using past

4 slots, in which R_n shows a received power value of n 'th slot. Further, for simplicity of description, cancel due to variation is not considered.

While, an ordinary averaging using FIR filter as shown
5 above is performed in embodiment 1, averaging in embodiment 2 is represented by

$$\text{averagedR}_n = R_n * \alpha + \text{averagedR}_{\{n-1\}} * (1 - \alpha)$$

... [FORMULA 2]

10

and exponential weighted averaging (averaging using IIR filter) is performed using the forgetting factor α . For example, when it is assumed as $\alpha = 0.25$, the same averaging effect as averaging of about 4 slots can be obtained.

15

Therefore, by performing such exponential weighted averaging, only one previous value (in the above formula, averaged $R_{(n-1)}$) of past received power value may be stored, thereby reducing the calculation amount.

20

Further, the propagation path variation estimation value and the transmit power changing amount estimation value are also calculation for immediately 1 slot previous values, and the calculation amount can be reduced.

25

Still further, when the effect of the value using received signals of past slots is to be changed, it can be achieved by changing the factor α .

The present invention has been described in detail with respect to various embodiments, and it will now be

apparent from the foregoing to those skilled in the art
that changes and modifications may be made without
departing from the invention in its broader aspects, and
it is the intention, therefore, in the appended claims to
5 cover all such changes and modifications as fall within
the true spirit of the invention.

00649361.074900

WHAT IS CLAIMED IS:

1. A CDMA reception apparatus comprising:

propagation path variation estimation means for
5 estimating a propagation path variation in a present
transmit power control section from respective transmit
power control sections in the past to obtain a propagation
path variation estimation value;

propagation path variation correction means for
10 correcting at least one of vector, amplitude and/or power
of a received signal of said plurality of transmit power
control sections with said propagation path variation
estimation value obtained by said propagation path
variation estimation means; and

15 averaging means for averaging at least one of vector,
amplitude and/or power of received signal of said plurality
of transmit power control sections corrected by said
propagation path variation correction means.

20 2. A CDMA reception apparatus comprising:

transmit power changing amount estimation means for
estimating a changing amount of transmit power of a
communication partner station varied by transmit power
control in the present transmit power control section from
25 respective transmit power control sections in the past;

transmit power changing amount correction means for
correcting at least one of vector, amplitude and/or power

of a received signal of said plurality of transmit power control sections with said transmit power changing amount estimation value obtained by said transmit power changing amount estimation means; and

5 averaging means for averaging at least one of vector, amplitude and/or power of received signal of said plurality of transmit power control sections corrected by said transmit power changing amount correction means.

10 3. The CDMA reception apparatus as claimed in Claim 1 or 2, wherein said averaging means is provided with
 vector addition means for performing vector addition;
 division means for dividing a vector added by said
vector addition means with a number of vectors added; and
15 means for converting vector divided by said division means into a power.

 4. The CDMA reception apparatus as claimed in Claim 1 or 2, wherein said averaging means is provided with
20 amplitude addition means for performing amplitude addition;
 division means for dividing an amplitude added by said amplitude addition means with a number of amplitudes added;
and
25 means for converting amplitude divided by said division means into a power.

5. The CDMA reception apparatus as claimed in Claim 1 or 2, wherein said averaging means is provided with power addition means for performing power addition; division means for dividing a power added by said power addition means with a number of powers added.

6. The CDMA reception apparatus as claimed in Claim 1, wherein said propagation path variation estimation means estimates a propagation path variation using a channel not performing transmit power control.

7. The CDMA reception apparatus as claimed in Claim 2, wherein said transmit power changing amount estimation means estimates a transmit power changing amount using a transmit power control indicator transmitted from own station.

8. The CDMA reception apparatus as claimed in Claim 1 or 2, wherein said averaging means further comprises averaging section setting means for setting an averaging section.

9. The CDMA reception apparatus as claimed in Claim 8, wherein said averaging section setting means comprises: means for setting said averaging section to a small section, when performing communication by a channel of which a power allocated to a signal subjected to received

signal power measurement existing in each transmit power control section is high; and

means for setting said averaging section to a large section, when performing communication by a channel of which a power allocated to a signal subjected to received signal power measurement existing in each transmit power control section is small.

10. The CDMA reception apparatus as claimed in Claim 8, wherein said averaging section setting means comprises:

means for setting said averaging section to a large section, when a partner transmit station performs transmit power control, there is a channel other than channel transmitting to said reception station and transmitting a channel not performing transmit power control with the same antenna and directivity, and propagation path variation estimation using said channel not performing transmit power control is possible; and

means for setting said averaging section to a small section, when a partner transmit station performs transmit power control, there is not a channel other than channel transmitting to said reception station and transmitting a channel not performing transmit power control with the same antenna and directivity, or even when transmitting but not performing transmit power control, and propagation path variation estimation using said channel not performing transmit power control is not possible.

11. The CDMA reception apparatus as claimed in Claim 8, wherein said averaging section setting means comprises:

traveling speed detection means for detecting a
5 relative traveling speed between a communication partner station and own station; and

means for setting said averaging section to a small section when said detected traveling speed is large, and for setting said averaging section to a large section when
10 said detected traveling speed is small.

12. A received signal power measurement method of a CDMA reception apparatus, comprising:

a propagation path variation estimation step for
15 estimating a propagation path variation in a present transmit power control section from respective transmit power control sections in the past to obtain a propagation path variation estimation value;

a propagation path variation correction step for
20 correcting at least one of vector, amplitude and/or power of a received signal of said plurality of transmit power control sections with said propagation path variation estimation value obtained by said propagation path variation estimation step; and

25 an averaging step for averaging at least one of vector, amplitude and/or power of received signal of said plurality of transmit power control sections corrected by said

propagation path variation correction step.

13. A received signal power measurement method of a CDMA reception apparatus, comprising:

5 a transmit power changing amount estimation step for estimating a changing amount of transmit power of a communication partner station varied by transmit power control in the present transmit power control section from respective transmit power control sections in the past;

10 a transmit power changing amount correction step for correcting at least one of vector, amplitude and/or power of a received signal of said plurality of transmit power control sections with said transmit power changing amount estimation value obtained by said transmit power changing amount estimation step; and

15 an averaging step for averaging at least one of vector, amplitude and/or power of received signal of said plurality of transmit power control sections corrected by said transmit power changing amount correction step.

20

14. The received signal power measurement method as claimed in Claim 12 or 13, wherein said averaging step is provided with

25 a vector addition step for performing vector addition;
 a division step for dividing a vector added by said vector addition step with a number of vectors added; and
 a step for converting vector divided by said division

step into a power.

15. The received signal power measurement method as
claimed in Claim 12 or 13, wherein said averaging step is
5 provided with

an amplitude addition step for performing amplitude
addition;

a division step for dividing an amplitude added by
said amplitude addition step with a number of amplitudes
10 added; and

a step for converting amplitude divided by said
division step into a power.

16. The received signal power measurement method as
15 claimed in Claim 12 or 13, wherein said averaging step is
provided with

a step for performing power addition;

a division step for dividing a power added by said
power addition step with a number of powers added.

20

17. The received signal power measurement method as
claimed in Claim 12, wherein said propagation path
variation estimation step estimates a propagation path
variation using a channel not performing transmit power
25 control.

18. The received signal power measurement method as

claimed in Claim 13, wherein said transmit power changing amount estimation step estimates a transmit power changing amount using a transmit power control indicator transmitted from own station.

5

19. The received signal power measurement method as claimed in Claim 12 or 13, wherein said averaging step further comprises an averaging section setting step for setting an averaging section.

10

20. The received signal power measurement method as claimed in Claim 19, wherein said averaging section setting step comprises:

15 a step for setting said averaging section to a small section, when performing communication by a channel of which a power allocated to a signal subjected to received signal power measurement existing in each transmit power control section is high; and

20 a step for setting said averaging section to a large section, when performing communication by a channel of which a power allocated to a signal subjected to received signal power measurement existing in each transmit power control section is small.

25 21. The received signal power measurement method as claimed in Claim 19, wherein said averaging section setting step comprises:

a step for setting said averaging section to a large section, when a partner transmit station performs transmit power control, there is a channel other than channel transmitting to said received station and transmitting a channel not performing transmit power control with the same antenna and directivity, and propagation path variation estimation using said channel not performing transmit power control is possible; and

a step for setting said averaging section to a small section, when a partner transmit station performs transmit power control, there is not a channel other than channel transmitting to said received station and transmitting a channel not performing transmit power control with the same antenna and directivity, or even when transmitting but not performing transmit power control, and propagation path variation estimation using said channel not performing transmit power control is not possible.

22. The received signal power measurement method as claimed in Claim 19, wherein said averaging section setting step comprises:

a step for detecting a relative traveling speed between a communication partner station and own station; and

a step for setting said averaging section to a small section when said detected traveling speed is large, and for setting said averaging section to a large section when

said detected traveling speed is small.

006T20" T926T960

ABSTRACT OF THE DISCLOSURE

In a CDMA reception apparatus, averaging means for averaging at least one of vector, amplitude and power of received signal of a plurality of transmit power control sections is provided. Further, propagation path variation estimation means for estimating a propagation path variation of the present transmit power control section from respective transmit power control sections in the past to obtain a propagation path variation estimation value and propagation path variation correction means (multiplier) for correcting by the propagation path variation estimation value are further provided, wherein the averaging means averages at least one of vector, amplitude and power of received signal of the plurality of transmit power control sections corrected by the propagation path variation correction means (multiplier). With this configuration, the measurement accuracy is improved by measuring received signal power using a plurality of slots including past slots, more accurate transmit power control is performed, thereby achieving improved communication quality, a reduced transmit power, and an increased capacity.

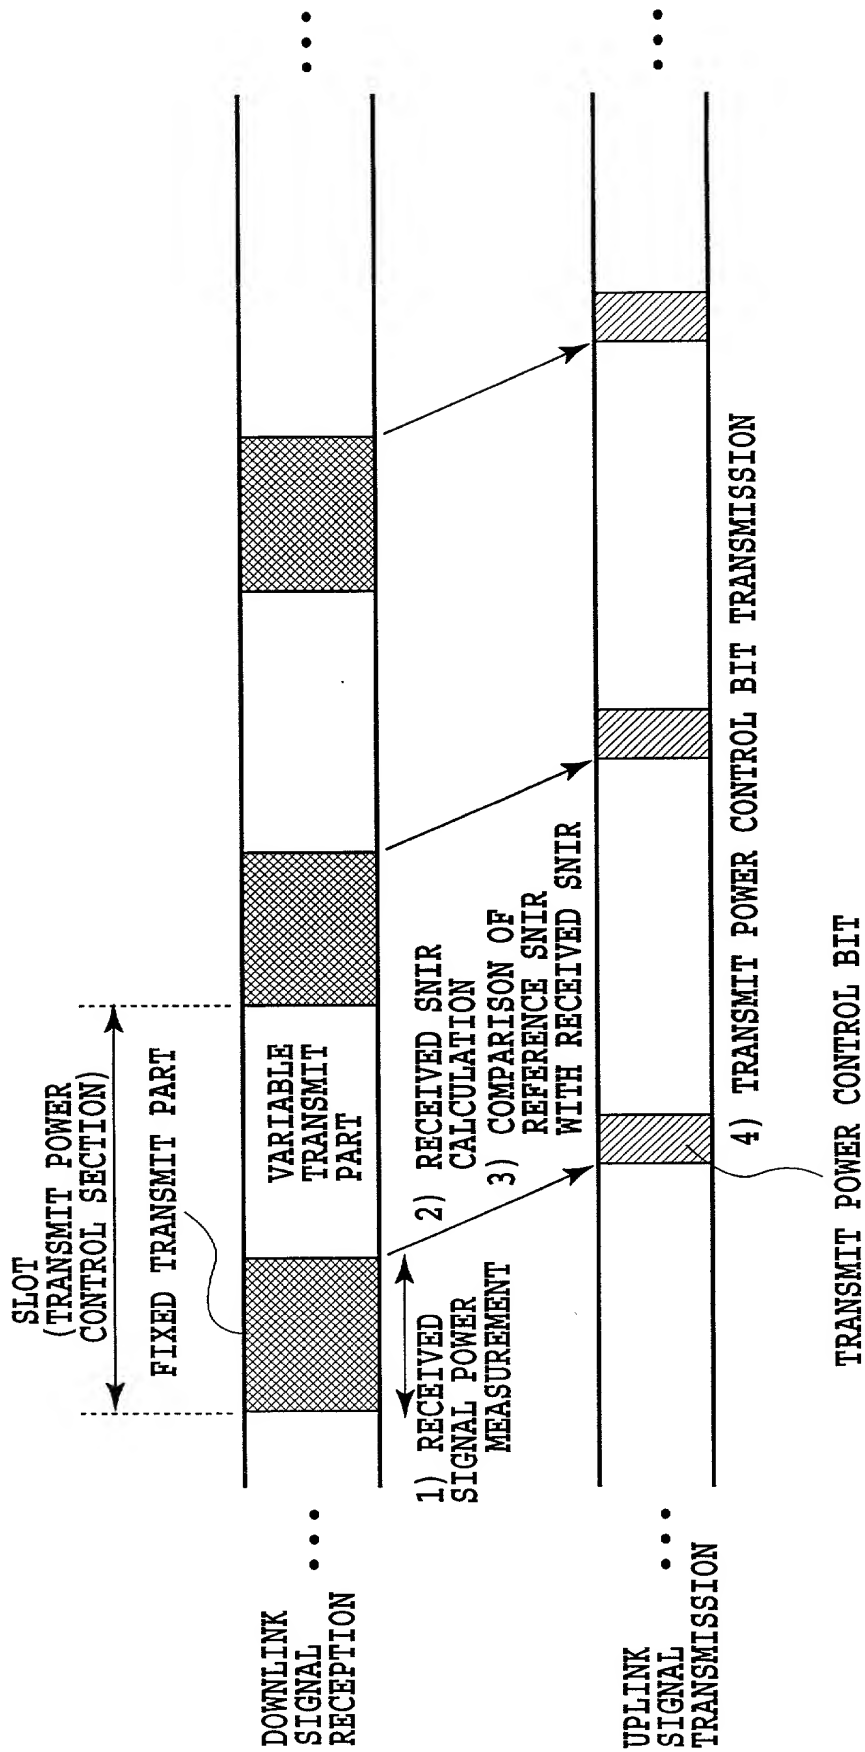


FIG.1

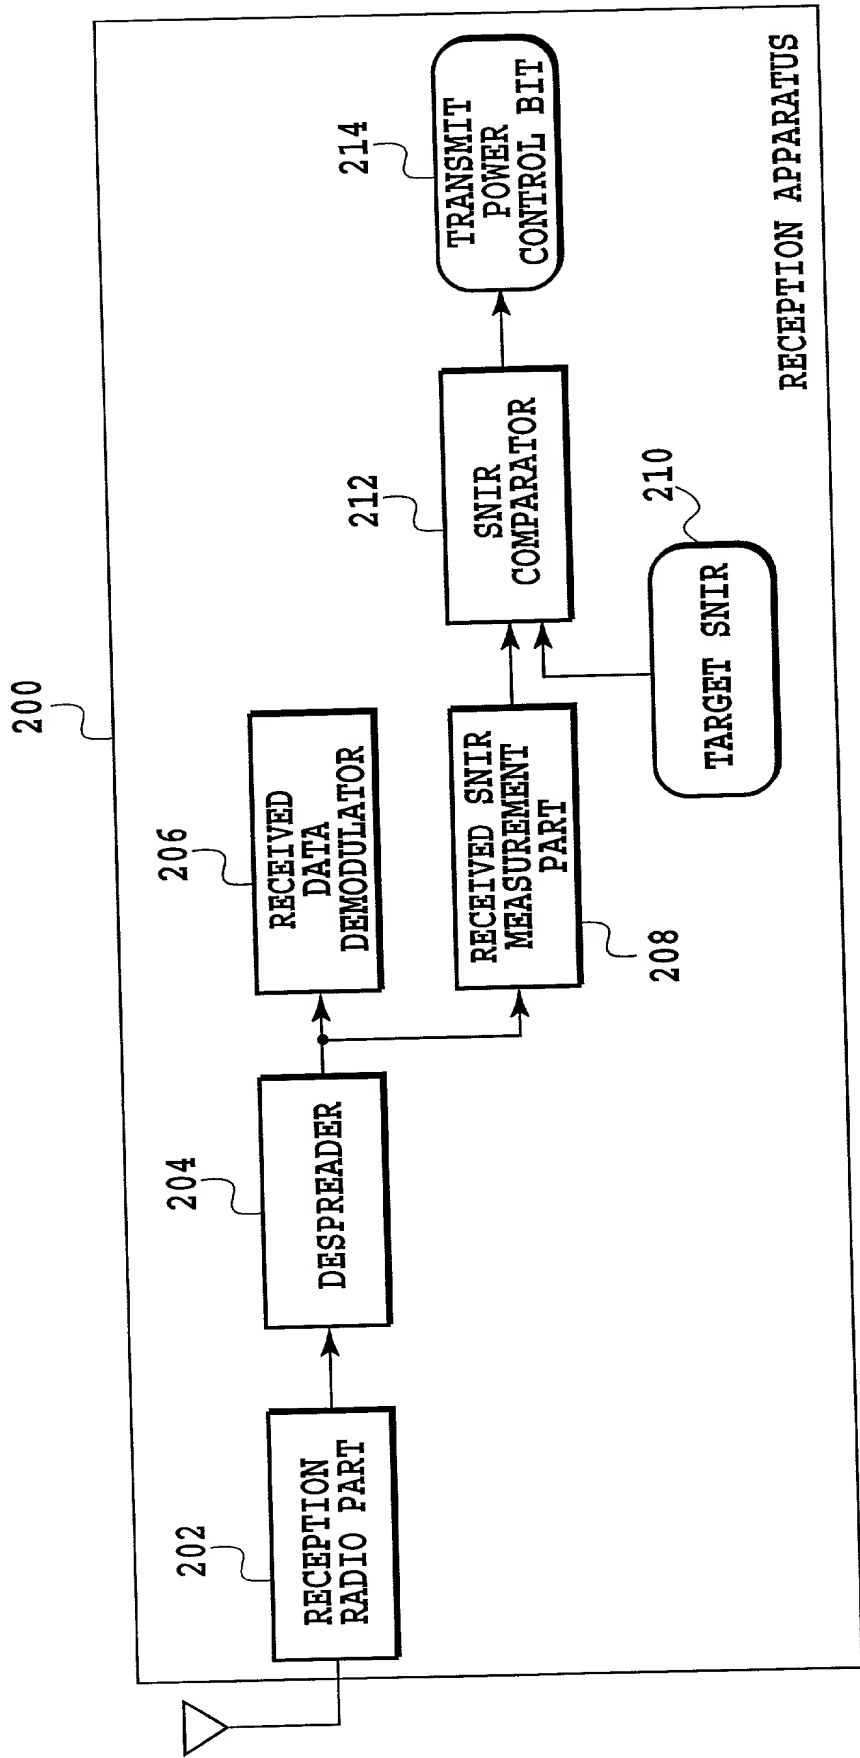


FIG.2

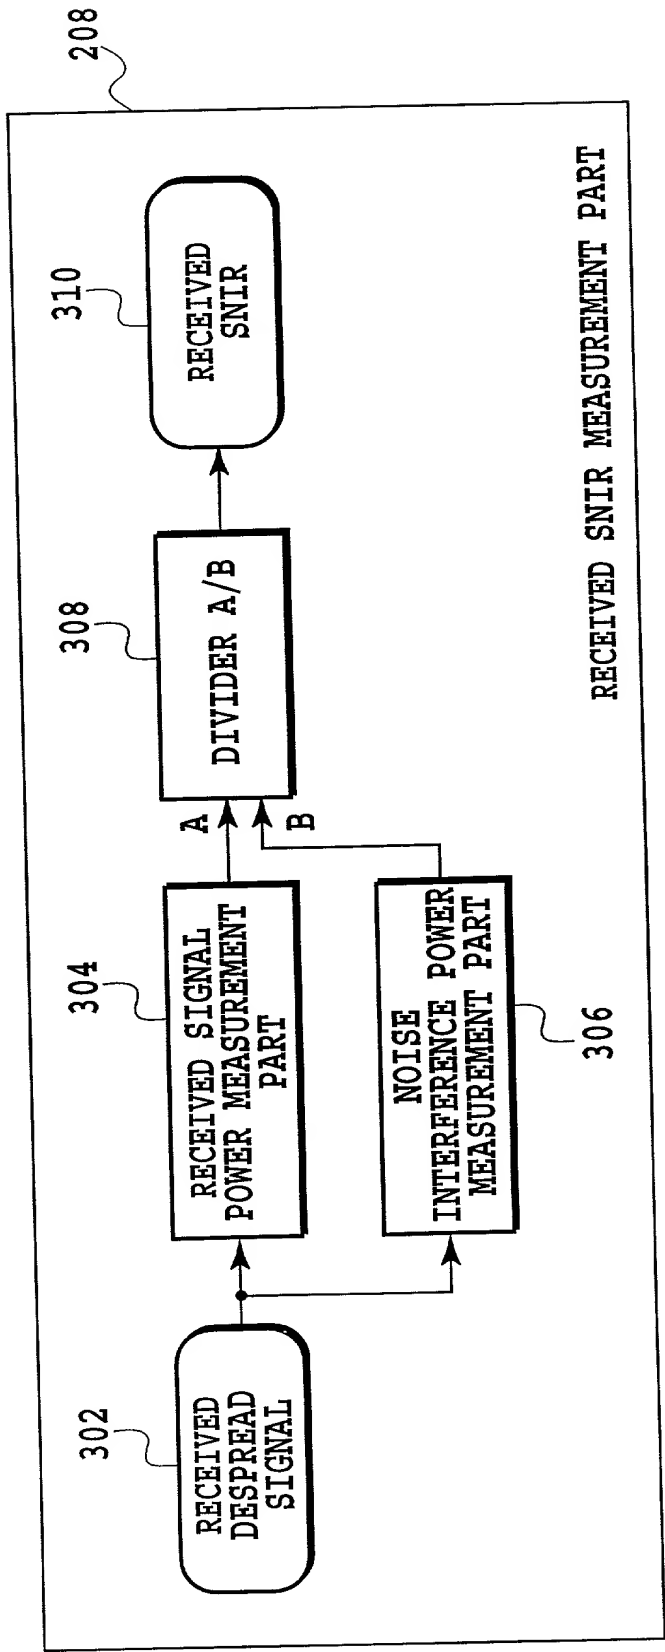


FIG.3

FIG.4

FIG.4A FIG.4B

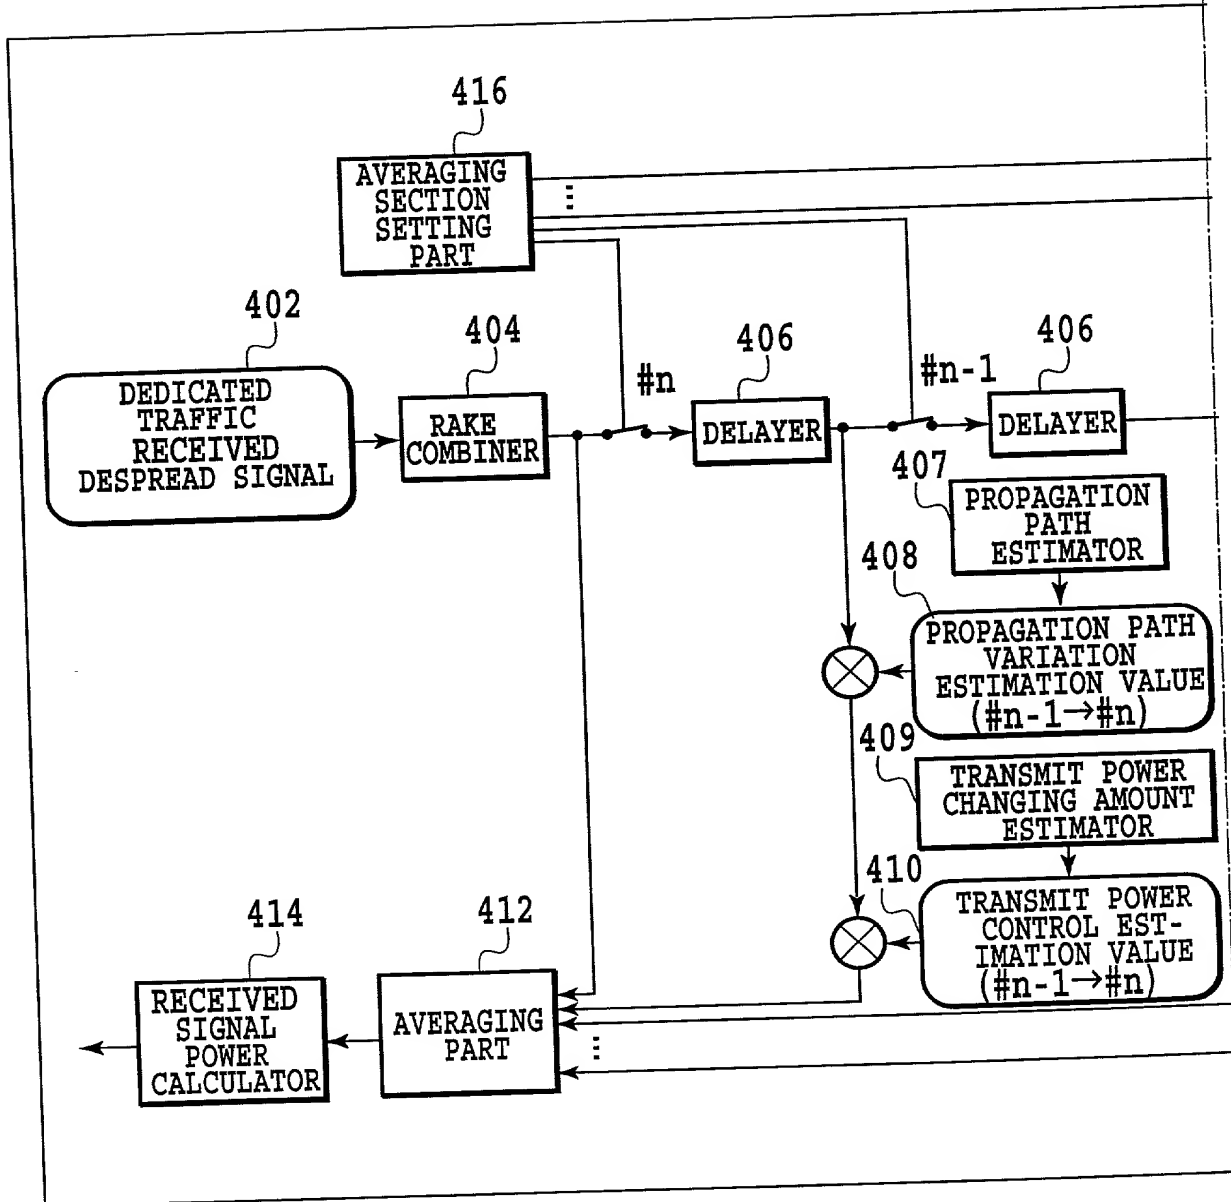


FIG.4A



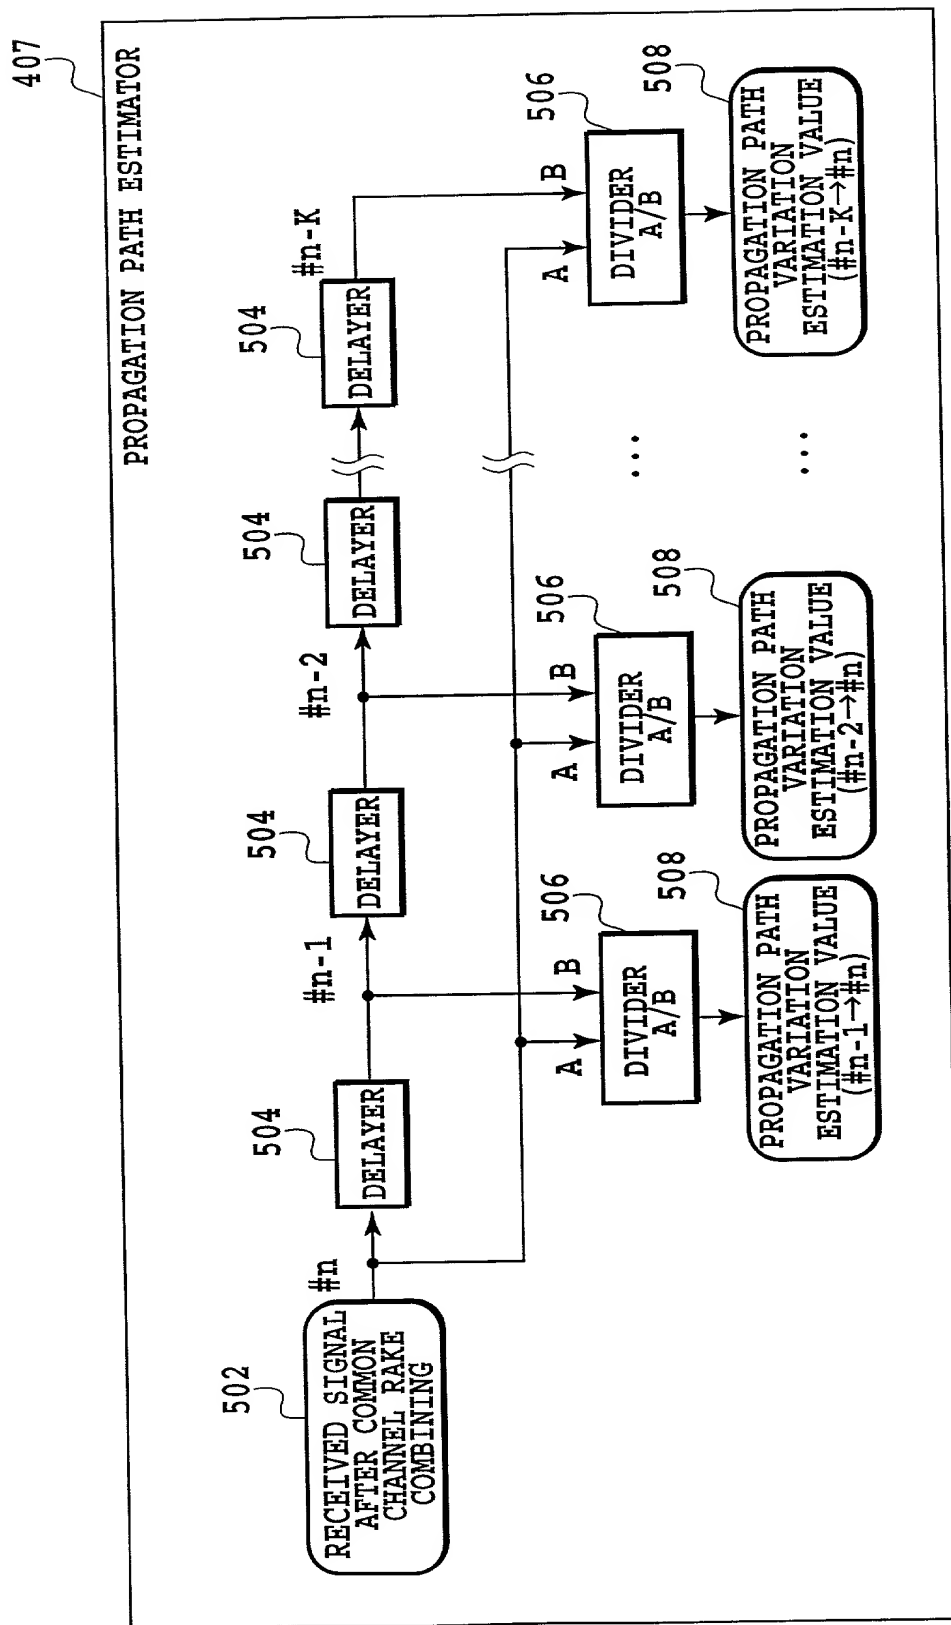


FIG. 5

409

TRANSMIT POWER CHANGING AMOUNT ESTIMATOR

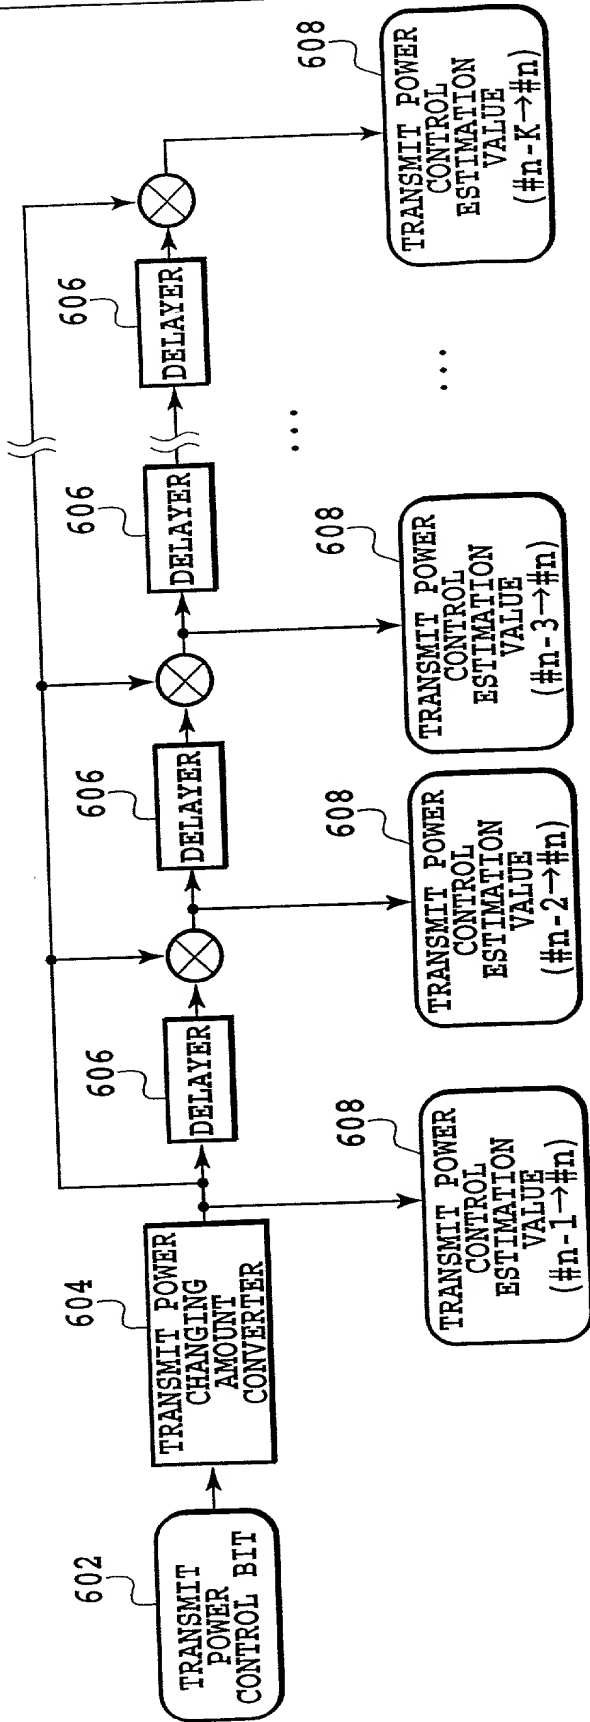


FIG.6

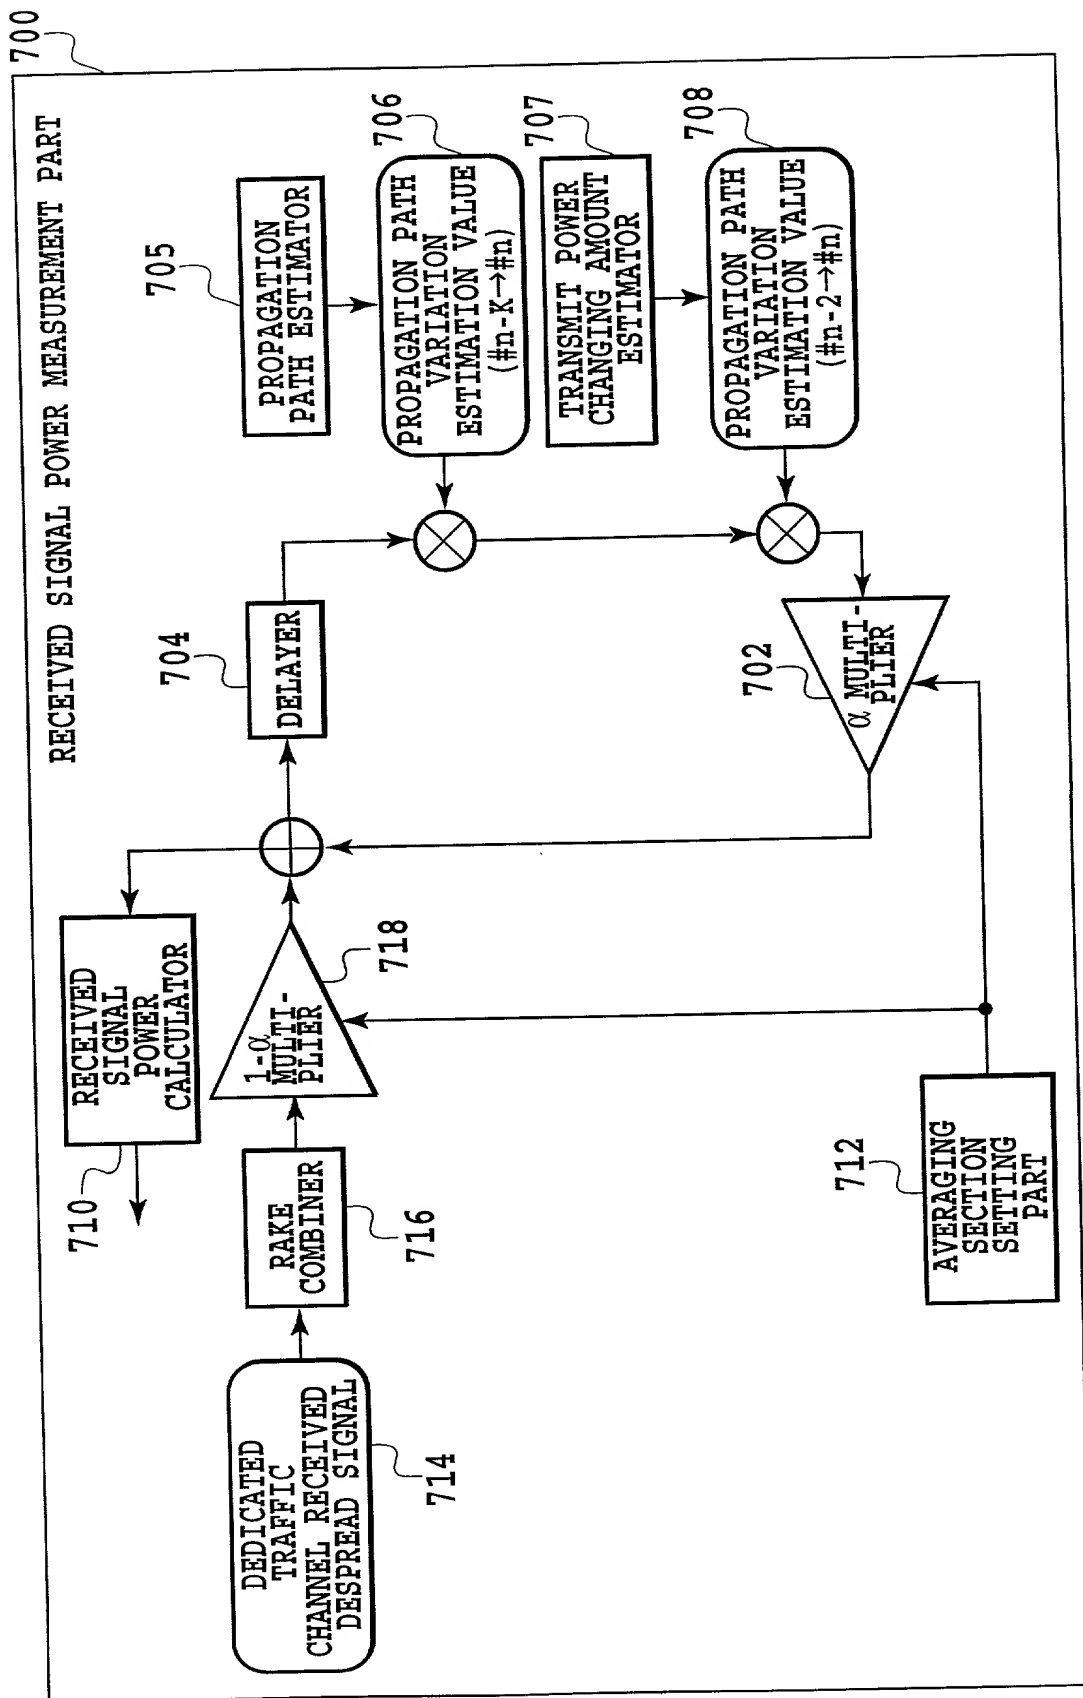


FIG.7

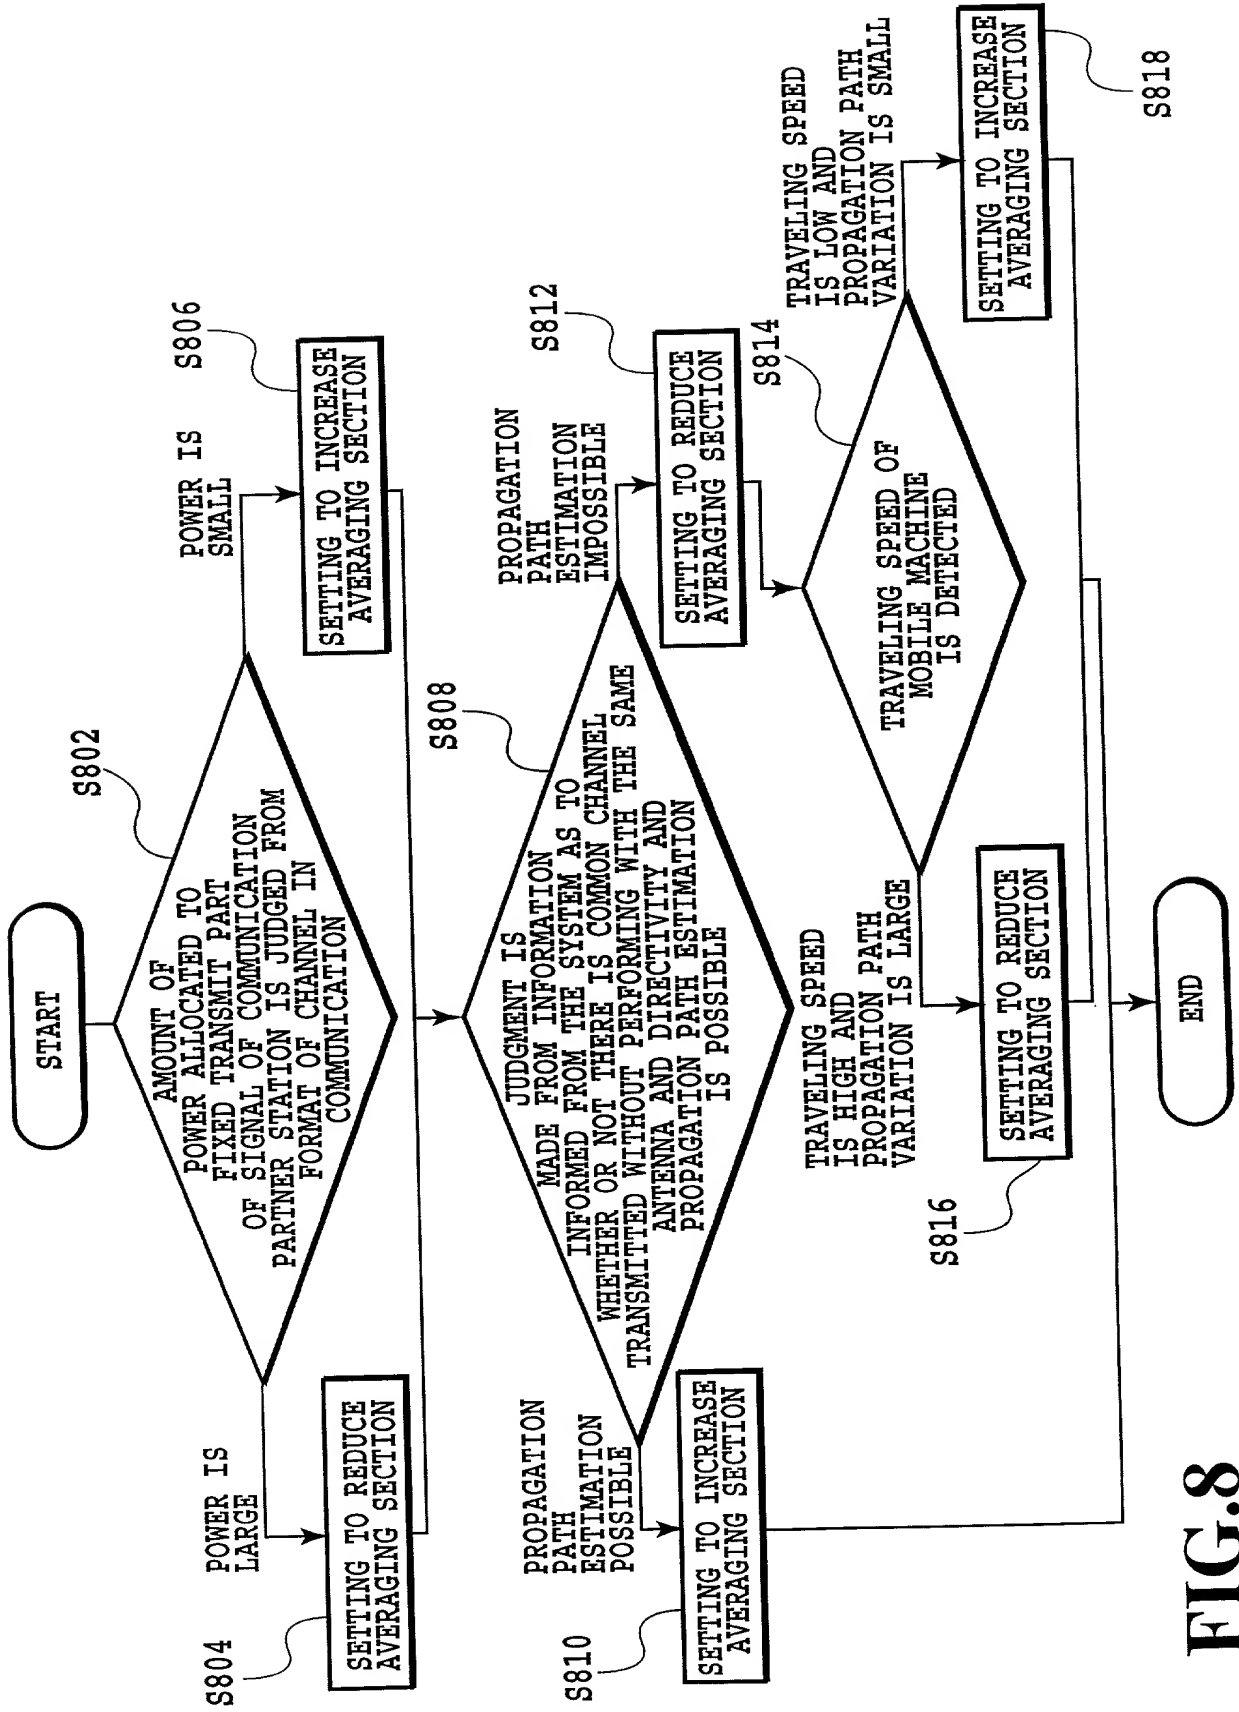


FIG.8

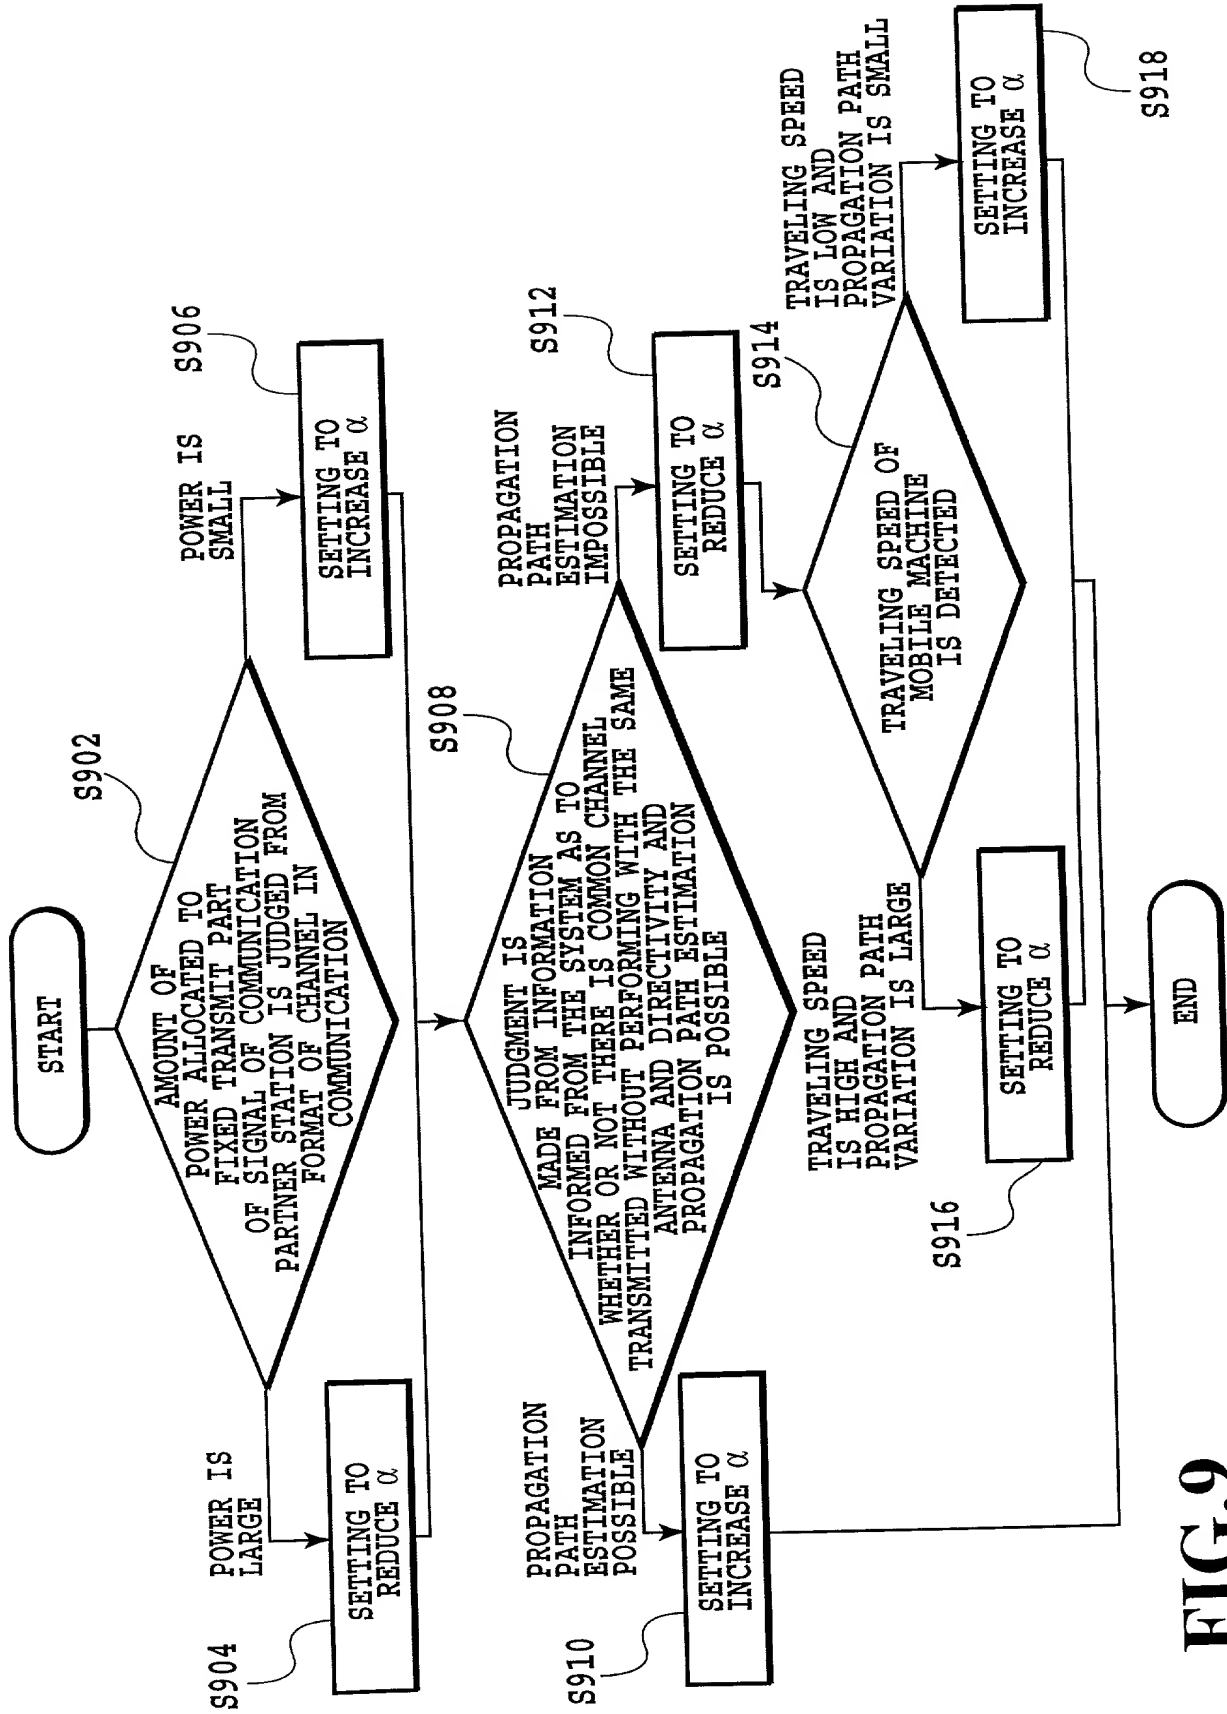


FIG.9

11/11

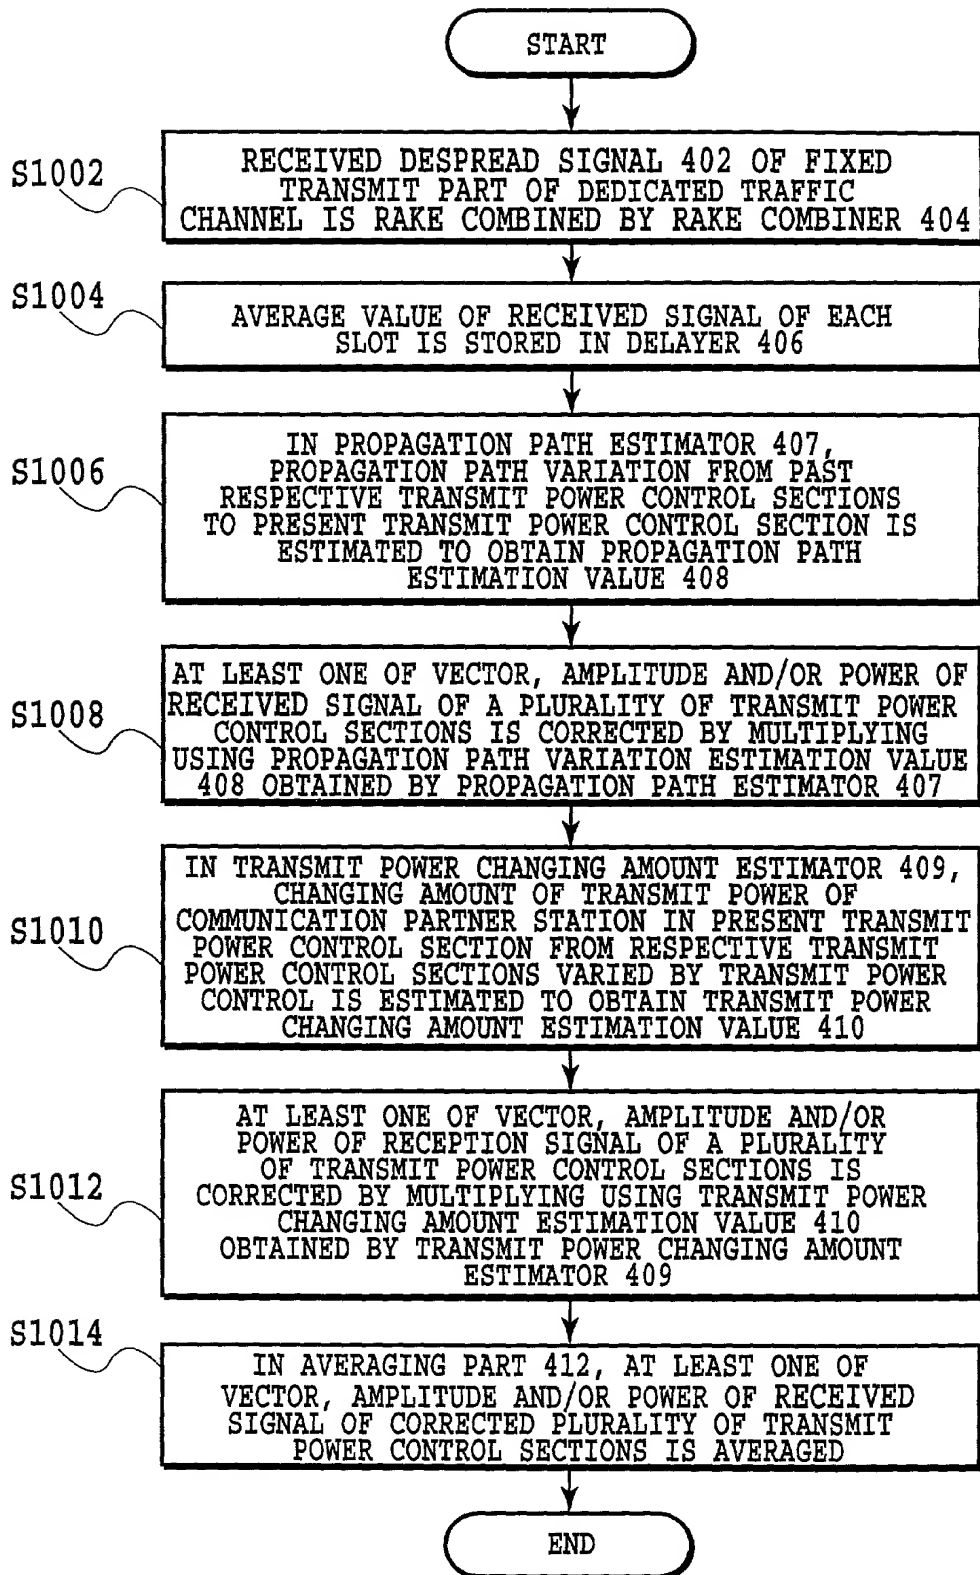


FIG.10

00619361.071900

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(COMPLETE IF KNOWN)

Application Number	
Filing Date	
Group Art Unit	
Examiner	

Attorney Docket Number	
First Named Inventor	USUDA

This declaration is (check one):

- () submitted with initial filing;
() submitted after initial filing;
() a supplemental declaration.

This application is of the following type:

- (X) utility;
() design;
() national stage of PCT;
() divisional, continuation or continuation-in-part.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**CDMA RECEPTION APPARATUS AND RECEIVED SIGNAL POWER
MEASURING APPARATUS IN CDMA MOBILE COMMUNICATION SYSTEM**

the specification of which: (check one)

- (X) is attached hereto; or
() was filed on _____ as U.S. Application No. _____
and is/was amended on _____ (if applicable);
() was described and claimed in PCT International Application No. _____,
filed on _____ and was amended under PCT Article 19 on _____
(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby identify below, and where indicated claim foreign priority benefits under Title 35, United States Code §§ 119(a)-(d) or §§ 365(a)-(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America, filed within 12 months (6 months for design) prior to

this application, and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) on which priority is claimed (if any):

Foreign/PCT Application Number	Country	Filing Date (MM/DD/YYYY)	Priority Claimed	
11-206789	Japan	21/7/1999	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below (if any):

Provisional Application No.	Filing Date

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International Application designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S./PCT Parent Application No.	Filing Date	Status (Patented, Pending, or Abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

As a named inventor, I hereby appoint the following attorney(s) or agent(s) with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Seth H. Ostrow, Reg. No. 37,410
 Neal K. Feivelson, Reg. No. 41,740
 Ivan M. Posey, Reg. No. 43,865

Louis J. Greco, Reg. No. 41,799
 Anthony J. Natoli, Reg. No. 36,223
 Larry Liberchuk, Reg. No. 40,352

Direct all correspondence to:

Brown Raysman Millstein Felder & Steiner LLP
 120 West 45th Street
 New York, New York 10036

Direct all telephone calls to:

(212) 944-1515

Full Name of Sole or First Inventor	Masafumi USUDA		
Inventor's Signature	<i>Masafumi Usuda</i>	Date	July 11, 2000
Residence	Kanagawa, Japan	Citizenship	Japan
Post Office Address	#102, 18-11, Nokendaideri, Kanazawa-ku, Yokohama-shi, Kanagawa 236-0053, Japan		

Full Name of Second Joint Inventor	Yoshihiro ISHIKAWA		
Inventor's Signature	<i>Yoshihiro Ishikawa</i>	Date	July 11, 2000
Residence	Kanagawa, Japan	Citizenship	Japan
Post Office Address	4-18-4-503, Nobi, Yokosuka-shi, Kanagawa 239-0841, Japan		

Full Name of Third Joint Inventor	Seizo ONOE		
Inventor's Signature	<i>Seizo Onoe</i>	Date	July 11, 2000
Residence	Kanagawa, Japan	Citizenship	Japan
Post Office Address	1974-21, Mutsuura-cho, Kanazawa-ku, Yokohama-shi, Kanagawa 236-0032, Japan		

(check one) Sheets containing additional joint inventors () are, (X) are not attached hereto.

005720-1957960